

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/085569 A1

(51) International Patent Classification⁷: **E05C 17/54**,
17/04, E05F 5/02

(21) International Application Number:
PCT/AU2005/000309

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004200846 3 March 2004 (03.03.2004) AU

(71) Applicant and

(72) Inventor: **PREDEBON, Dyna, Kellie** [AU/AU]; c/-Terry
Hurlock & Associates, 15 Patrick Street, Aitkenvale, QLD
4814 (AU).

(74) Agent: **CULLEN & CO.**; Level 26, 239 George Street,
Brisbane, QLD 4000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: A DOOR STAY

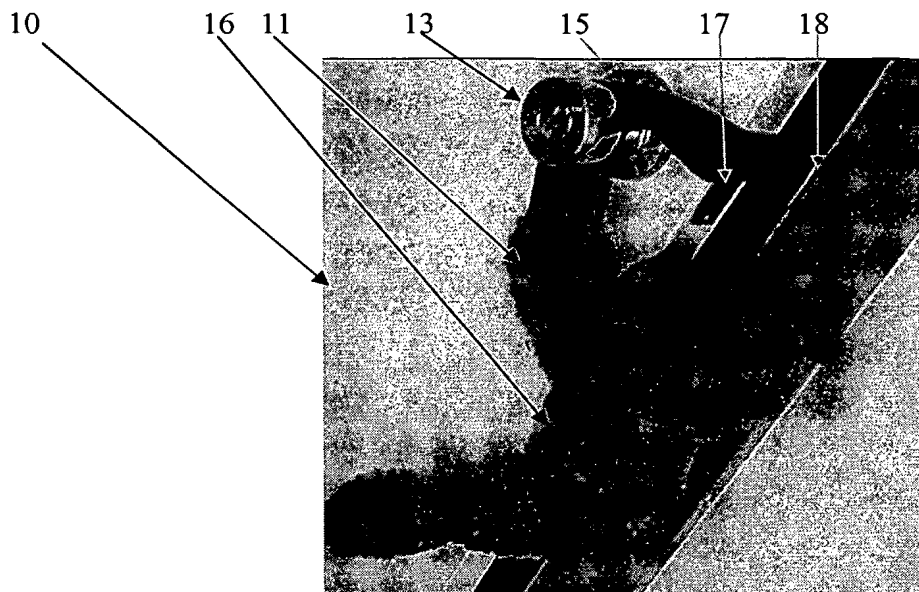

(57) Abstract: A door stay (10) having a first part (11) adapted to be supported by door handle (13) on one side of the door, a second part (12) adapted to be supported by the door handle (14) on the other side of the door, and an intermediate part (16) that is adapted to extend over the edge of the door to prevent the latch tongue (17) from engaging with the keeper (18).



WO 2005/085569 A1